





ZirChrom®

Technical
Bulletin #143

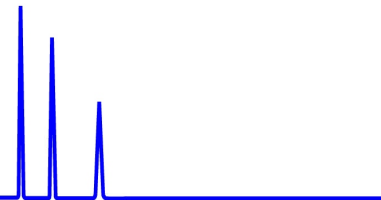

... For Peak Performance

Plant Genins Separation on ZirChrom®-PHASE

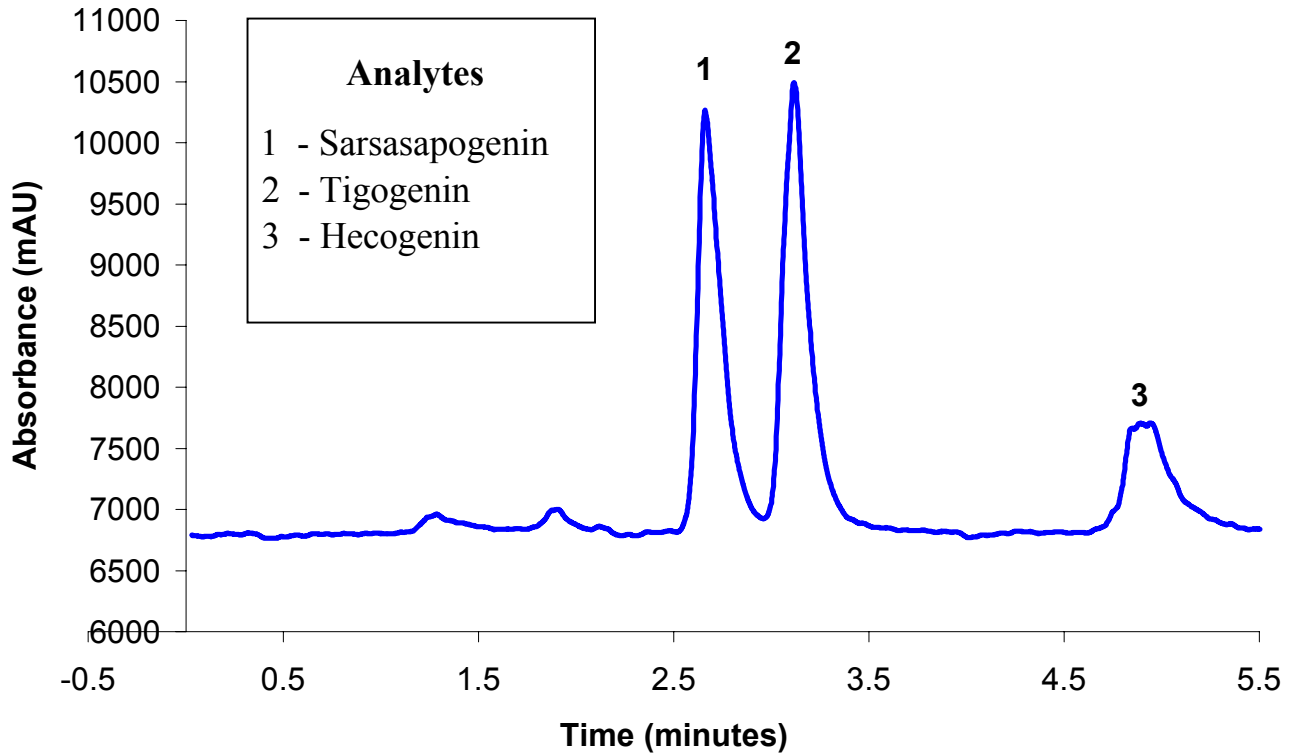

LC Conditions

Column: ZirChrom®-PHASE, 150 x 4.6 mm

Mobile Phase: 67/33 A/B

A: Hexane

B: Acetone

Flow rate: 1.0 ml/min.

Temperature: Ambient

Detection: ELSD Detector

1.0 ml/min.

Ambient

ELSD Detector

